

ASC250/600/1000

For 250, 600 and 1000 Kg spools and bundles.

Per bobine e rocchetti da 250, 600 e 1000 Kg.

Para bobinas y madejas de 250, 600 y 1000 Kg.

	ASC250-08-V1	ASC250-10-V1	ASC600-08-V3	ASC600-10-V3	ASC600-10-V1	ASC600-12-V1	ASC1000-14-V1	ASC1000-14-V2
Features Caratteristiche Características	<ul style="list-style-type: none"> Reclining side rods to facilitate loading Adjustable tension of the dancer 							
Capacity Capacità di carico Capacidad de carga	250 Kg		600 Kg			1000 Kg		
Recommended for wire: Raccomandato per filo: Recomendado para hilo:	$\varnothing 0,5 \div 3 \text{ mm}$ with ASC-OP-02 $\varnothing 0,1 \div 3 \text{ mm}$						$\varnothing 0,5 \div 3 \text{ mm}$	$\varnothing 1 \div 10 \text{ mm}$
\varnothing Plate \varnothing Piatto \varnothing Plato	$\varnothing 800 \text{ mm}$	$\varnothing 1000 \text{ mm}$	$\varnothing 800 \text{ mm}$	$\varnothing 1000 \text{ mm}$	$\varnothing 1000 \text{ mm}$	$\varnothing 1200 \text{ mm}$	$\varnothing 1400 \text{ mm}$	
Height of the plate Altezza del piatto Alto de la mesa	850 mm						420 mm with ASC-OP-08 870 mm	
Inside bundle diameter Diametro interno matassa Diámetro interior madeja	$\varnothing 215 \div 600 \text{ mm}$	$\varnothing 215 \div 700 \text{ mm}$	$\varnothing 215 \div 600 \text{ mm}$	$\varnothing 215 \div 700 \text{ mm}$	$\varnothing 215 \div 700 \text{ mm}$	$\varnothing 215 \div 900 \text{ mm}$	$\varnothing 300 \div 1200 \text{ mm}$	
Power supply Alimentazione Alimentación	200-240 Vac 3,5Kw							
Max speed Velocità max Velocidad máxima	85 rpm						80 rpm	


ASC600-12-V1



ASC600-08-V3 / ASC600-10-V3



ASC1000-14-V1

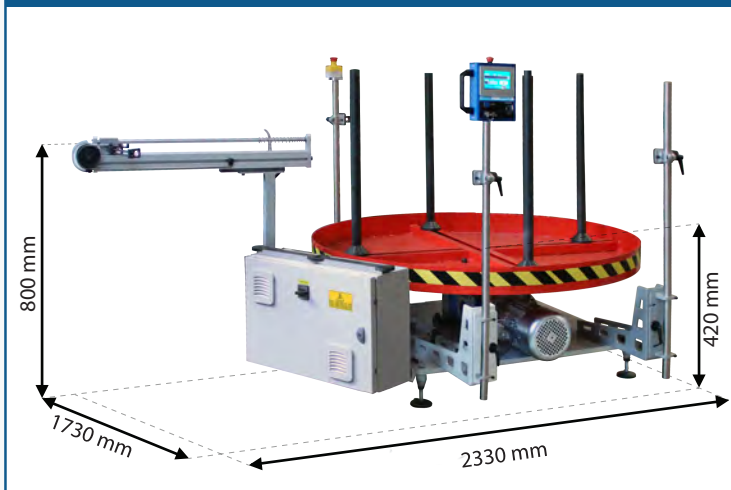

ASC1000-14-V2

