

ASC100

The flexible solution

Die flexible Lösung

La solution flexible

AVAILABLE MODELS	ASC100-06-V1	ASC100-08-V1	ASC100-Cu
Features Eigenschaften Caractéristiques	• Self adjustable in 4 conf.		<ul style="list-style-type: none"> • Self adjustable in 2 conf. • Large pulley • Without wire support
Recommended for wire* Empfohlen für Draht* Recommandé pour fil*	Conf. B + C: $\varnothing 0,1 \div 1 \text{ mm}$ ($\varnothing .004 \div .04''$) Conf. A + D: $\varnothing 0,1 \div 0,8 \text{ mm}$ ($\varnothing .004 \div .03''$)		$\varnothing 0,1 \div 2,5 \text{ mm}$ ($\varnothing .004 \div .09''$) Copper and aluminium wire
Capacity Tragfähigkeit Portée utile	CONFIGURATION A AND B		HORIZONTAL PLATE
	100 Kg (220 lb)		100 Kg (220 lb)
	CONFIGURATION C AND D		VERTICAL PLATE
	100 Kg for spools up to 50 mm wide (220 lb - 1.96'')		50 Kg for spools from 51 up to 200 mm wide (110 lb - from 2 up to 7.87'')
\varnothing Plate \varnothing Platte \varnothing Plateau	$\varnothing 620 \text{ mm flat}$ ($\varnothing 24.4''$)	$\varnothing 800 \text{ mm}$ with / without 15 mm border ($\varnothing 31.5'' - .6''$)	$\varnothing 620 \text{ mm flat}$ ($\varnothing 24.4''$)
Plate orientation Orientierung der Platte Orientation de le plateau	Horizontal / Vertical		
Inside bundle diameter Bund Innendurchmesser Diamètre intérieur couronne	$\varnothing 140 \div 450 \text{ mm}$ ($\varnothing 5.5 \div 17.7''$)	$\varnothing 215 \div 600 \text{ mm}$ ($\varnothing 8.5 \div 23.6''$)	$\varnothing 140 \div 450 \text{ mm}$ ($\varnothing 5.5 \div 17.7''$)
Max Speed Höchstgeschwindigkeit Vitesse maximale	120 rpm		125 rpm

*MicroStudio also has a ASC100 model for flat strips up to 14 mm wide, with a plate diameter of 620 or 800 mm


*Microstudio hat auch ein ASC100 Modell für Flachdraht und Bandmaterial bis zu 14 mm Länge und ein Durchmesser der Platte von 620 mm oder 800 mm

*MicroStudio dispose d'un modèle de ASC100 pour les feuillard jusqu'à 14 mm de large, avec un diamètre de le plateau de 620 ou 800 mm




ASC100-06-V1 / ASC100-08-V1


CONFIGURATION A
REDUCED DIMENSIONS

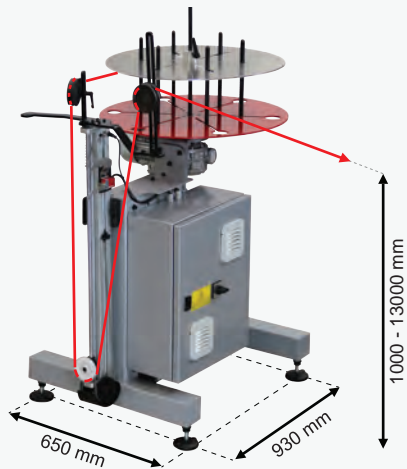


CONFIGURATION B
EVER FOR THICKER WIRE

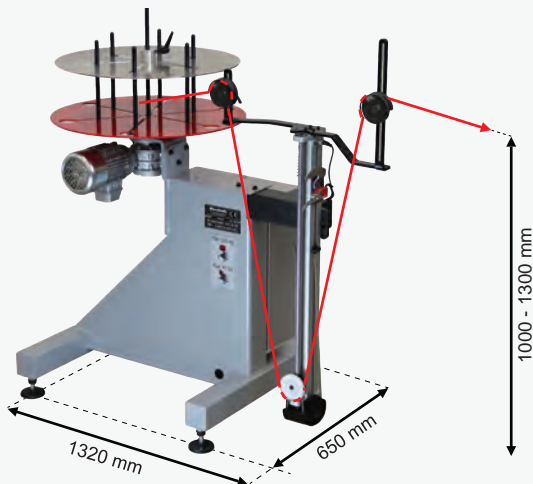

CONFIGURATION C
RECOMMENDED FOR SMALL SPOOLS

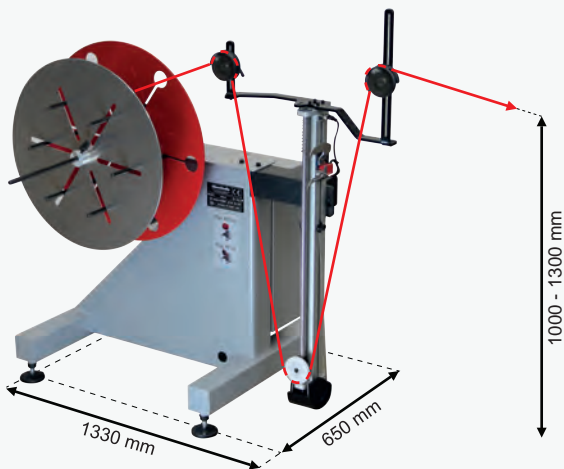


CONFIGURATION D
REDUCED DIMENSIONS

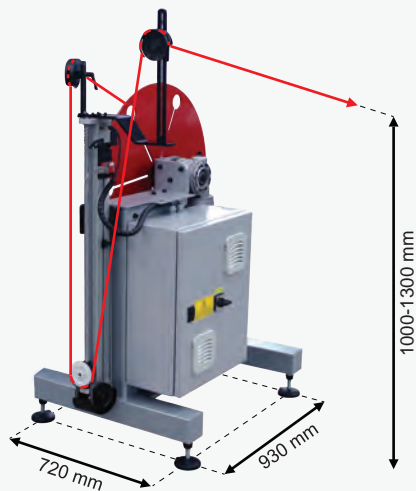

ASC100-Cu

CONFIGURATION A

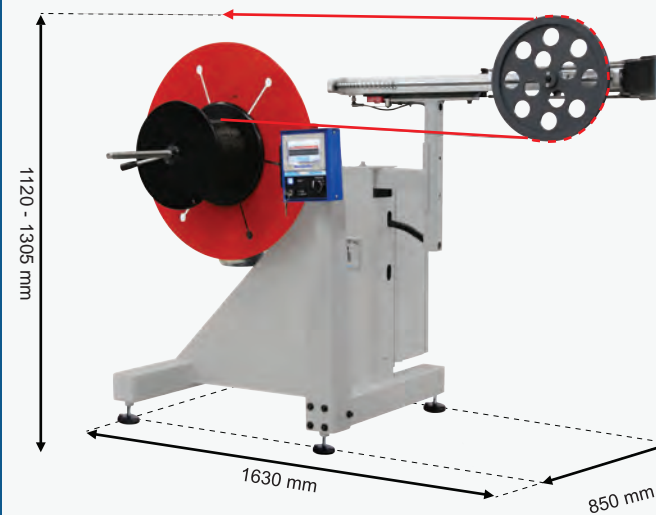

CONFIGURATION B

