


ASC610/1000

Decoiler with lower plate for 600 e 1000 Kg spools and bundles

Aspo con piano ribassato per bobine e rocchetti da 600 e 1000 Kg

Desbobinadores con placa inferior para bobinas y madejas de 600 y 1000 Kg


AVAILABLE MODELS	ASC610-10-V1	ASC610-12-V1	ASC1000-14-V1	ASC1000-14-V2
Features Caratteristiche Características	<ul style="list-style-type: none"> Reclining side rods to facilitate loading Adjustable tension of the dancer 			
Capacity Capacità di carico Capacidad de carga	600 Kg (1322 lb)		1000 Kg (2204 lb)	
Recommended for wire Raccomandato per filo Recomendado para hilo	ø 0,5 ÷ 3 mm (ø .01 ÷ .11")		ø 0,5 ÷ 3 mm (ø .01 ÷ .11")	ø 1 ÷ 10 mm (ø .03 ÷ .39")
ø Plate ø Piatto ø Plato	1000 mm (39.4")	1200 mm (47.2")	1400 mm (55.1")	
Height of the plate Altezza del piatto Alto de la mesa	410 mm (16.1")		510 mm - 960 mm with ASC-OP-08 (20.1" - 37.8")	
Inside bundle diameter Diametro interno matassa Diámetro interior madeja	ø 215 ÷ 700 mm (ø 8.5 ÷ 27.5")	ø 215 ÷ 800 mm (ø 8.5 ÷ 31.5")	ø 300 ÷ 1200 mm (ø 11.8 ÷ 47.2")	
Max speed Velocità max Velocidad máxima	110 rpm (Optional ASC-OP-27 recommended)		80 rpm	

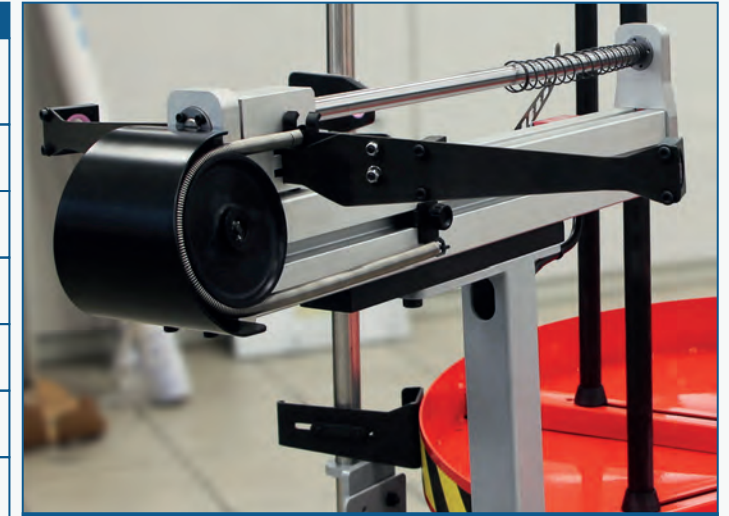

ASC610-10-V1 / ASC610-12-V1



ASC1000-14-V1

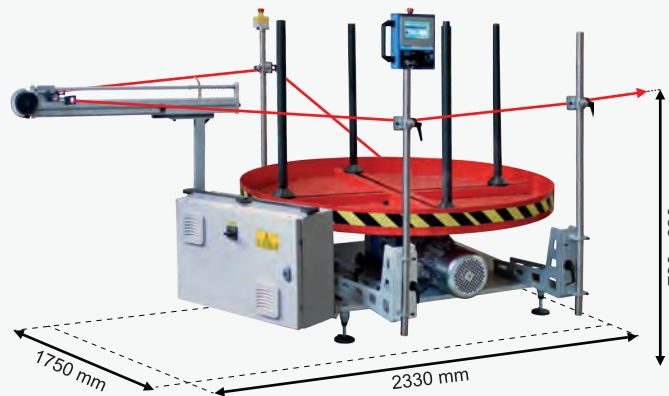

ASC1000-14-V2

