


FCF/FCL

Automatic loading systems for compression springs and cylindrical components

压簧和圆柱弹簧自动上料系统

FCF/FCL FEATURES

- High flexibility: covers a wide dimensional range of springs
- Quick setting: low adjustment times for article change
- Simple system: high efficiency and reliability
- Autonomy: large tank capacity
- Low consumption and low noise: motorized movements, limited use of compressed air
- Only for springs that do not tangle
- 弹簧覆盖范围广
- 快速设置：更换产品设置时间少
- 系统简便：高效、可靠
- 灵活：大容量
- 低能耗、低噪音：马达驱动，少量使用压缩空气
- 仅适用不缠绕弹簧

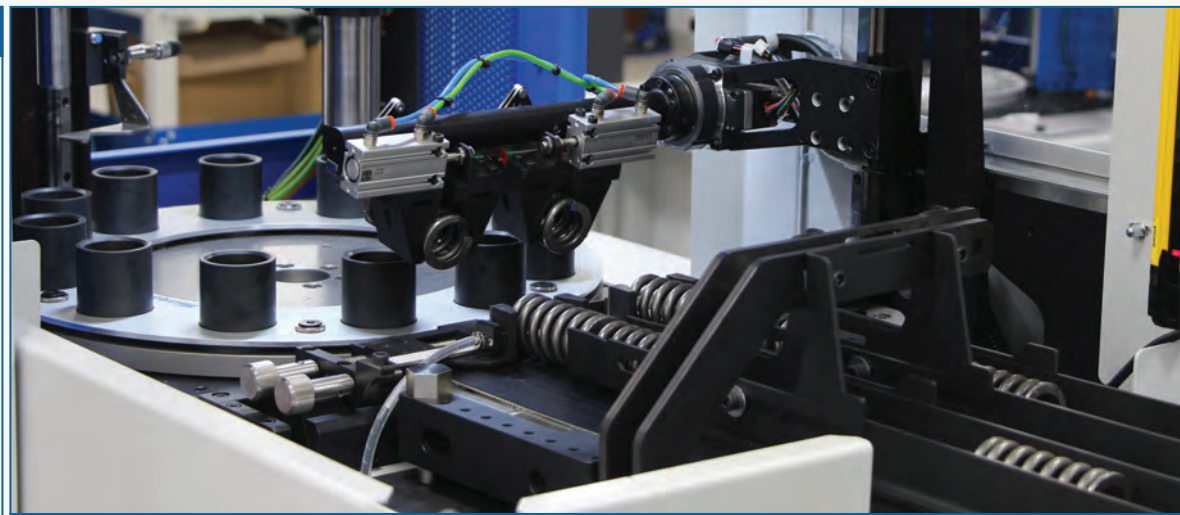

AVAILABLE MODELS 型号	FCF2 - FCL2	FCF3 - FCL3
	SPRINGS FEATURES 弹簧特性	
External diameter 外径	10 ÷ 29 mm (.39 ÷ 1.14")	16 ÷ 62 mm (.62 ÷ 2.44")
Min length 最小长度	2 x external diameter 2 倍 外径	2 x external diameter 2 倍 外径
Max length 最大长度	70 mm (2.75")	204 mm (8.03")
Shape 形状	Only cylindrical springs that do not tangle. For each type of spring, checks must be carried out by sending samples to MicroStudio. 仅适用于不缠绕圆柱弹簧。对于其它类型弹簧，需寄样给MicroStudio确认。	
	GENERAL FEATURES 一般特性	
Tank capacity 容量	25 liters	250 liters
Spring exit height 弹簧出口高度	Adjustable 1140 - 1840 mm 可调 (44.88 - 72.44")	1100 mm (44.3")
Dimensions 尺寸	627 x 650 mm (24.68 x 25.6")	2600 x 1600 mm (102.36 x 62.99")
Compatible with: 兼容	MC54-150 / RDZ500 / RDZ900	MC54-1000 / MC5-2000 / MC5-4000



FCF2 / FCL2

**OPTIONAL FC-OP-04
MOTORIZED HOPPER**
选配FC-OP-04 料斗

FCF2

FCL2

RDZ900



FCF3 / FCL3

MC54-1000

FCF3

FCL3

