
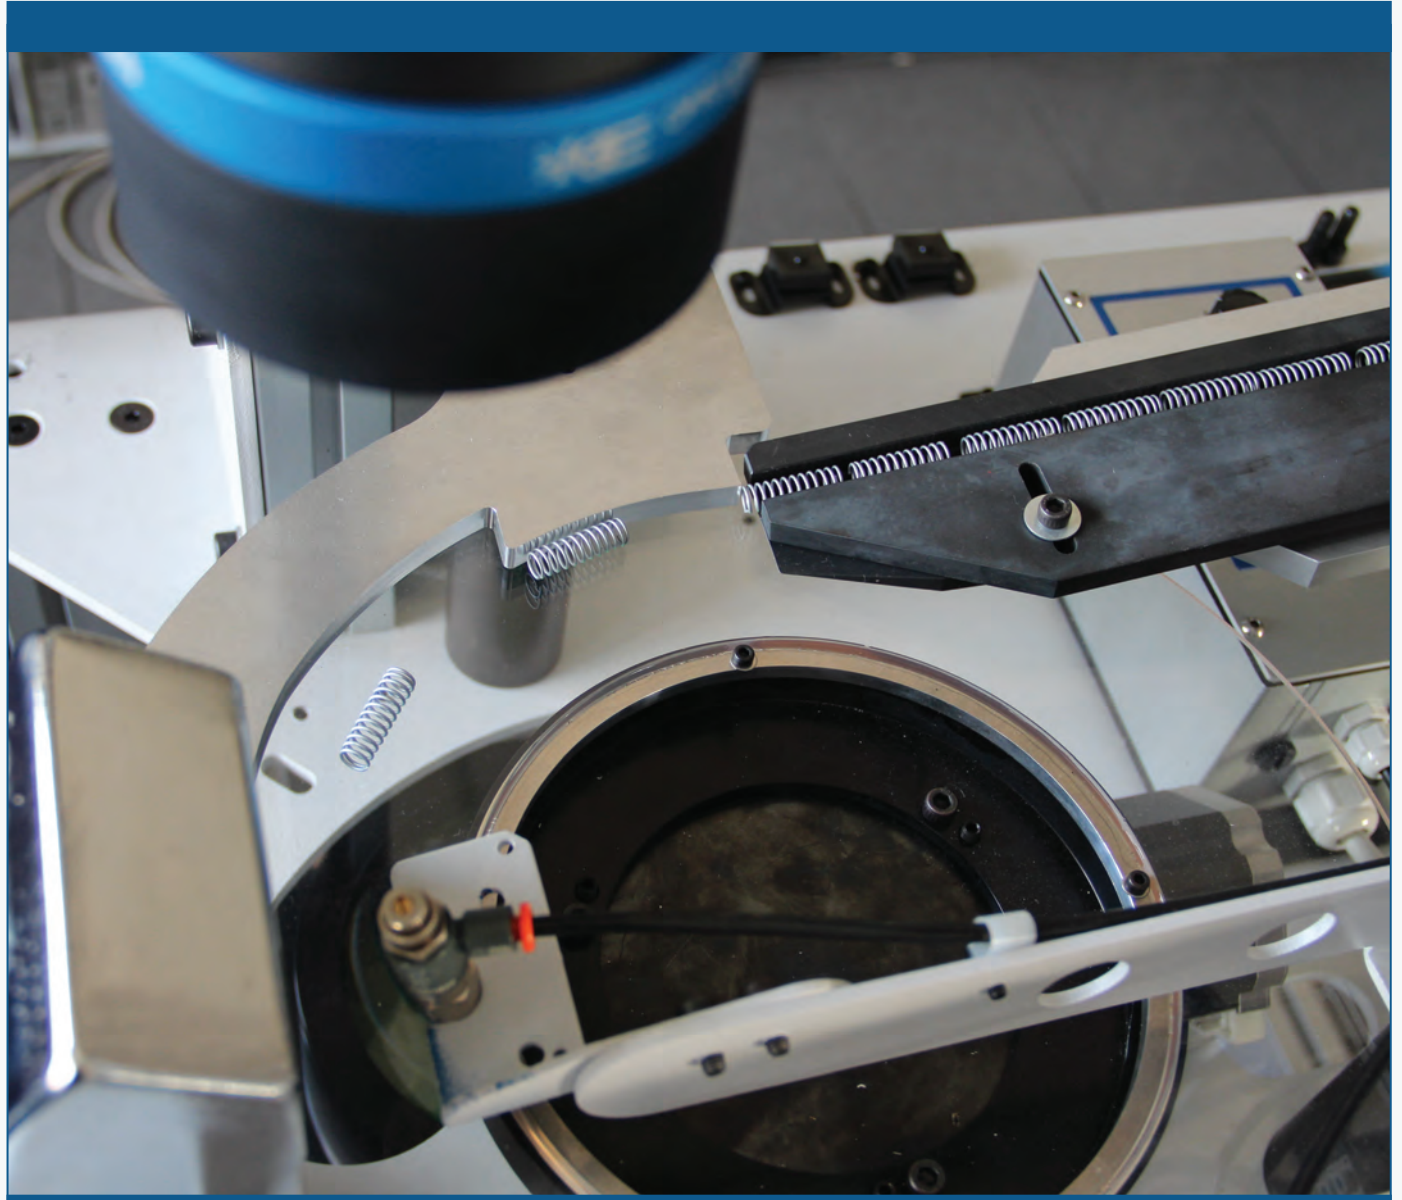


Automatic high speed profile control gauge for the last step of production inspection

全自动尺寸全检测量仪

SCR FEATURES

- Camera gauge LED2D with telecentric lens and collimate lighting
- Linear vibrator or conveyor belt for the feeding of parts
- Motor controlled turning plate at programmable speed
- Software based on LED2D technology for the searching and profile control
- Sorting by three ways sorter or air blast selection (good / bad) for high selection speed
- 带远心透镜和平行光的LED2D影像测量仪
- 线性送料振动盘或输送带
- 马达控制旋转盘
- LED2D技术控制软件
- 三门高速气动分选 (合格/不合格)

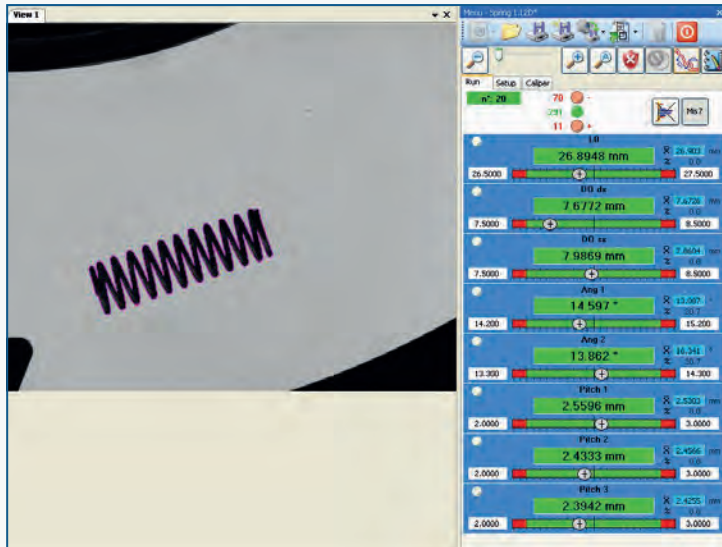

AVAILABLE MODELS 型号		SCR36	SCR50	SCR65
*Measurable features *测量特性	**Max recommended length **建议最大长度	30 mm (1.18")	40 mm (1.57")	60 mm (2.36")
	Absolute max length 绝对最大长度	20 mm (.78")	28 mm (1.10")	44 mm (1.73")
	Max width 最大宽度	15 mm (.59")	20 mm (.78")	30 mm (1.18")
	Min. measurable thickness 最小测量厚度	0,15 mm (.006")	0,2 mm (.008")	0,3 mm (.019")
Resolution of the measurements 测量分辨率	0,01 mm (.0004")	0,02 mm (.0008")	0,03 mm (.0012")	
***Typical production speed ***测量速度	6000 pcs/h	4500 pcs/h	3000 pcs/h	
Real power consumption 能耗	110 W at max speed 最大速度 6000 pcs/h			
Dimensions 尺寸	880 x 975 x 1843 H mm (34.6 x 38.4 x 72.5 H")			

*Indicative value to be confirmed after doing the machine technical acceptance

**If the length is more important, this will reduce the production rate

***Indicative value recorded with a spring having a length equivalent the half of the max recommended spring

*机器技术验收指示值

**长度影响测量速度

***记录指示值的弹簧长度是建议的最大弹簧长度的一半

