

ASCxx-SP



The easy solution to unwind spools. No forklift needed

La soluzione pratica per lo svolgimento delle bobine. Non richiede mezzi meccanici per il caricamento

La solución práctica para desenrollar las bobinas. No requiere medios mecánicos para la carga

| AVAILABLE MODELS | ASC20-SP-V0 | ASC20-SP-V1 | ASC500-SP-V1 | ASC500-SP-V2 |
|--|--|--|---|---|
| Features Caratteristiche Características | <ul style="list-style-type: none"> For thin wire Unwinding at medium or slow speed | <ul style="list-style-type: none"> For thin wire Unwinding at high speed | <ul style="list-style-type: none"> For thin wire | <ul style="list-style-type: none"> For medium wire |
| Capacity Capacità di carico Capacidad de carga | 40 / 20 Kg* (88.18 / 44.9 lb) | 20 Kg (44.9 lb) | 450 Kg (992 lb) | |
| Spool diameter Diametro della bobina Diámetro de la bobina | ø max 300 mm (11.81") | | ø 500 ÷ 760 mm (19.68 ÷ 29.92") | |
| Max spool width Larghezza max bobina Ancho máxima bobina | 250 mm (9.84") | | 400 mm (15.74") | |
| Recommended for wire Raccomandato per filo Recomendado para hilo | ø 0,1 ÷ 0,4 mm (.003 ÷ .015") | | ø 0,2 ÷ 0,6 mm (.007 ÷ .02") | ø 0,35 ÷ 1,6 mm (.013 ÷ .06") |
| Max speed Velocità max Velocidad máxima | 75 rpm | 300 rpm | 95 rpm | |
| Spool loading Caricamento bobina Carga de la carrete | Manual | | Motorized | |

*Max 40 Kg for spools up to 120 mm wide / Max. 20 Kg for spools up to 250 mm wide

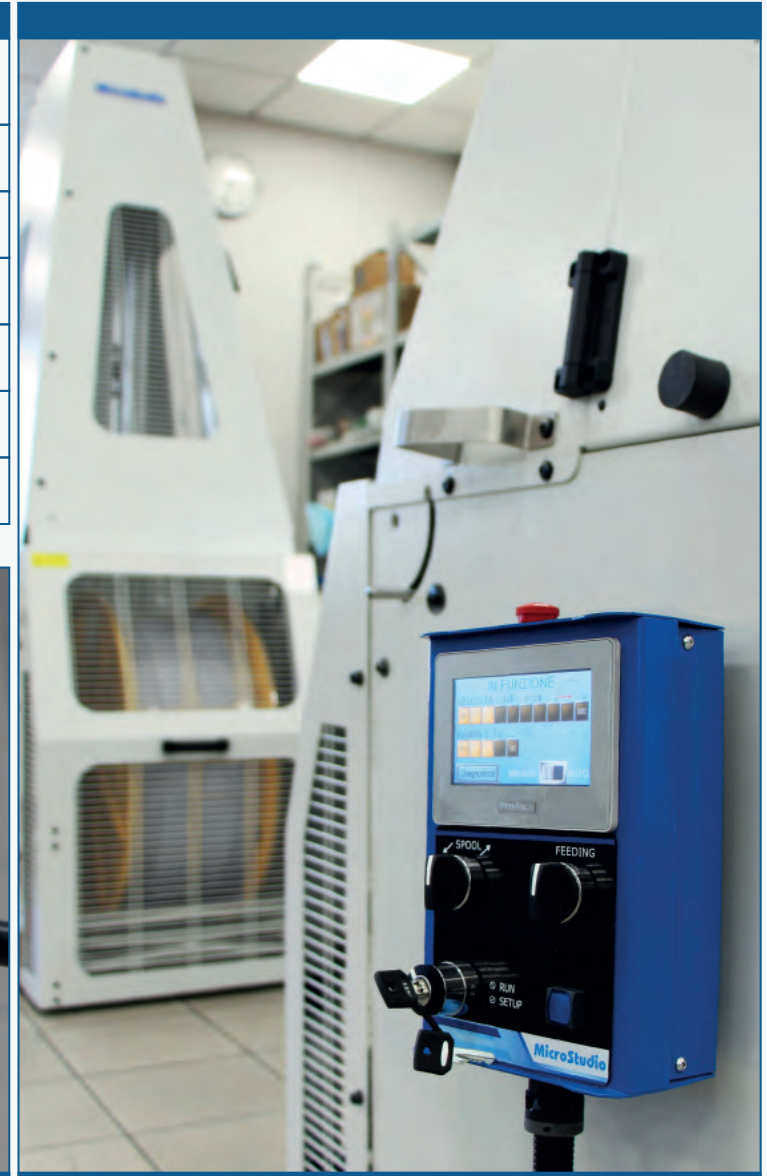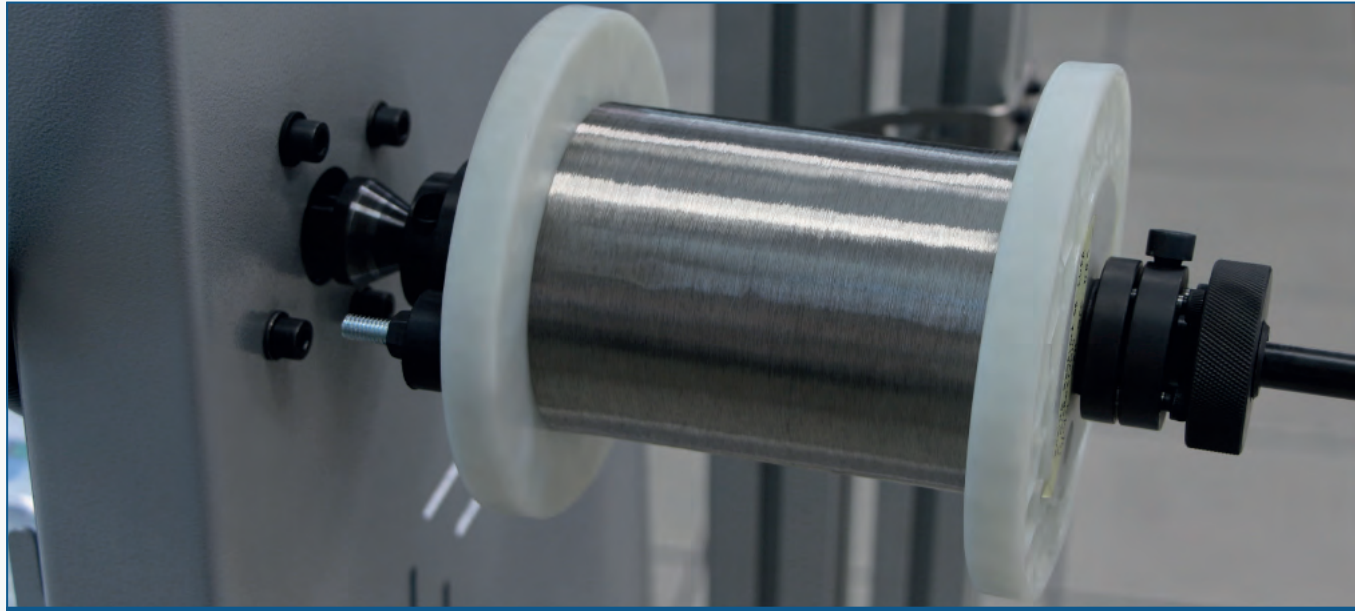

ASC20-SP-V0 / ASC20-SP-V1



ASC500-SP-V1 / ASC500-SP-V2

