

ASC610-G1

Pay-off with lower plate for 600 kg spools and bundles, with safety perimeter guards


Haspel mit niedrige auflageplatte für Bündel und Spulen von 600 kg

Dévidoir avec plateau inférieur pour les bobines et les couronnes de 600 kg

AVAILABLE MODELS	ASC610-10-G1	ASC610-12-G1
Features Eigenschaften Caractéristiques	• Double wire and shock absorber included • It is possible to install the ASC-OP-02 optional, second dancer arm for thin wires	
Capacity Tragfähigkeit Portée utile	600 kg (1322 lb)	
Recommended for wire Empfohlen für Draht Recommandé pour fil	ø 0,5 ÷ 3 mm (ø .01 ÷ .11")	
ø Plate ø Platte ø Plateau	1000 mm (39.4") with 40 mm border	1200 mm (47.2") with 40 mm border
Height of the table Höhe der Platte Haut de la table	410 mm (16.14")	
Inside bundle diameter Bund Innendurchmesser ø intérieur de la couronne	215 mm (8.46")	
Max Speed Höchstgeschwindigkeit Vitesse maximale	110 rpm (Optional ASC-OP-27 recommended)	
Guards features Barrieren: Merkmale Caract. barrières	• Fixing to the ground is not mandatory, but is necessary if there is a risk of pay-off dragging in case of large wires, heavy spools or tangling at high speeds. • Double opening door	



ASC610-G1

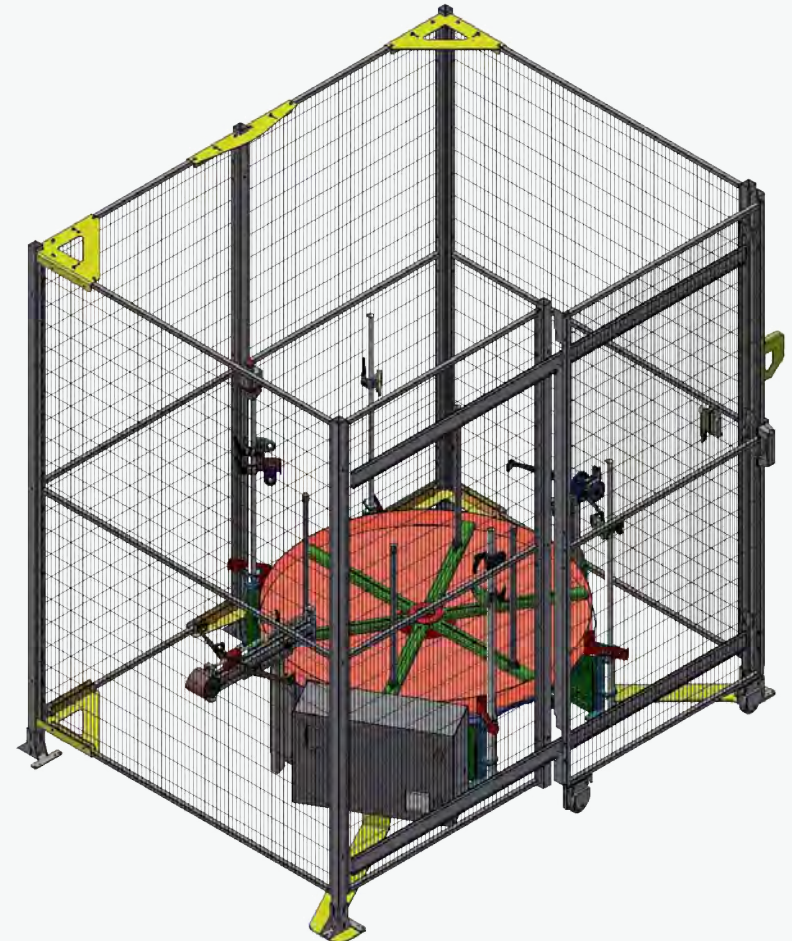

ASC610-10-G1 / ASC612-10-G1

