

ASCxx-SP


The easy solution to unwind spools. No forklift needed

Die einfache Lösung zum Abwickeln der spulen. Zur Beladung der Drahtspule, werden keine Hilfsmittel benötigt

Une solution facile pour dérouler les bobines. Pas besoin de matériel de levage pour la mise en place du fil

AVAILABLE MODELS	ASC20-SP-V0	ASC20-SP-V1	ASC500-SP-V1	ASC500-SP-V2
Features Eigenschaften Caractéristiques	- For thin wire - Unwinding at medium or slow speed	- For thin wire - Unwinding at high speed	For thin wire	For medium wire
Capacity Tragfähigkeit Portée utile	40 / 20 kg* (88.18 / 44.9 lb)	20 kg (44.9 lb)	450 kg (992 lb)	
Spool diameter Durchmesser des Bundes Diamètre de la bobine	ø max 300 mm (11.81")		ø 500 ÷ 760 mm (19.68 ÷ 29.92")	
Max spool width Breite des Bundes Epasséur de la bobine	250 mm (9.84")		400 mm (15.74")	
Recommended for wire Empfohlen für Draht Recommandé pour fil	ø 0,1 ÷ 0,4 mm (.003 ÷ .015")		ø 0,2 ÷ 0,6 mm (.007 ÷ .02")	ø 0,35 ÷ 1,6 mm (.013 ÷ .06")
Max speed Höchstgeschwindigkeit Vitesse maximale	75 rpm	300 rpm	95 rpm	
Spool loading Ladung der Spule Chargement de la bobine	Manual		Motorized	

*Max 40 kg for spools up to 120 mm wide / Max. 20 kg for spools up to 250 mm wide

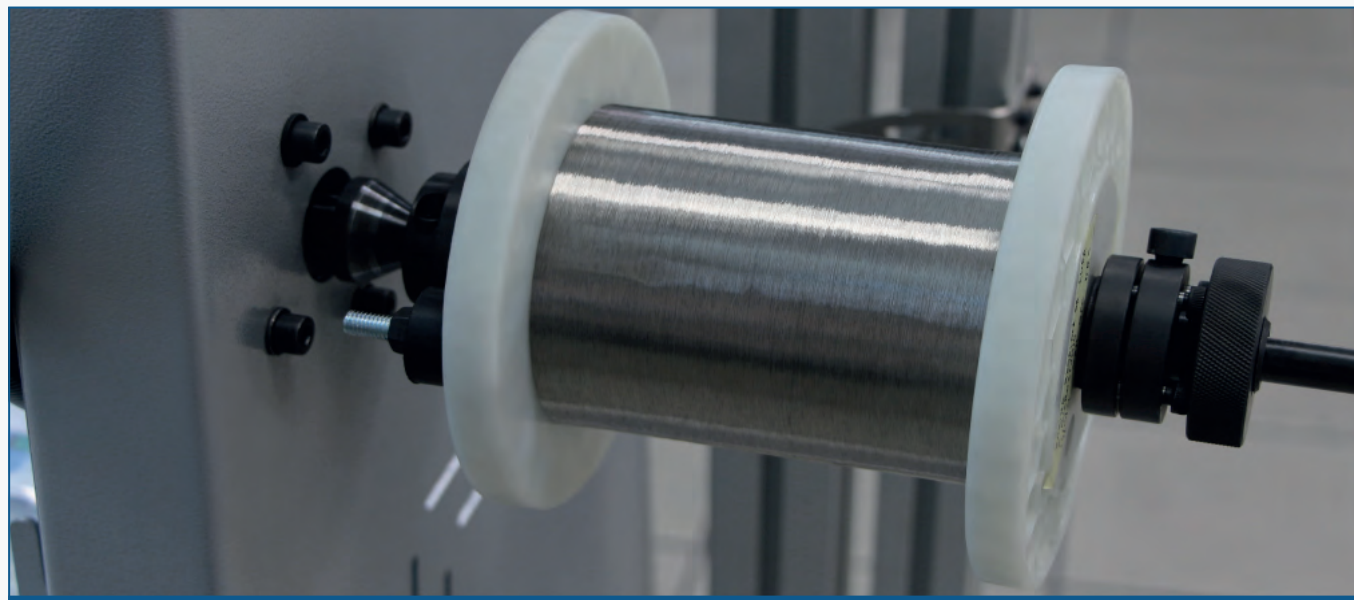

ASC20-SP-V0 / ASC20-SP-V1



ASC500-SP-V1 / ASC500-SP-V2

