

ASC100

The flexible solution: 100 kg pay-off with safety perimeter guards

La soluzione flessibile: Aspo svolgitore da 100 kg con barriere di protezione

La solución flexible: Desenrollador de 100 kg con barreras de protección


AVAILABLE MODELS	ASC100-06-G1	ASC100-08-G1
Features Caratteristiche Características	2 configurations that can be modified by the operator: - Configuration A: Horizontal plate - Configuration B: Vertical plate	
Recommended for wire Raccomandato per filo Recomendado para hilo	$\varnothing 0,1 \div 0,8 \text{ mm}$ ($\varnothing .004 \div .03''$)	
Capacity Capacità di carico Capacidad de carga	CONFIGURATION A - HORIZONTAL PLATE	
	100 kg (220 lb)	
	CONFIGURATION D - VERTICAL PLATE	
	50 kg for spools wider than 50 mm (100 lb - 1.96'')	
$\varnothing$ Plate $\varnothing$ Piatto $\varnothing$ Plato	$\varnothing 620 \text{ mm flat}$ ($\varnothing 24.4''$)	$\varnothing 800 \text{ mm}$ with / without 15 mm border ^[1] ($\varnothing 31.5'' - .6''$)
Plate orientation Orientamento del piatto Orientación del plato	Horizontal / Vertical	
Inside bundle diameter Diametro interno matassa Diámetro interior madeja	$\varnothing 140 \div 450 \text{ mm}$ ($\varnothing 5.5 \div 17.7''$)	$\varnothing 215 \div 600 \text{ mm}$ ($\varnothing 8.4 \div 23.6''$)
Max speed Velocità max Velocidad máxima	120 rpm	
Guards features Caratteristiche barriere Características barreras	Fixing to the ground is not mandatory, but is necessary if there is a risk of pay-off dragging in case of large wires, heavy spools or tangling at high speeds.	

^[1] PLATE WITH / WITHOUT 15 MM BORDER


UPSIDE DOWN



ASC100 CONFIGURATIONS

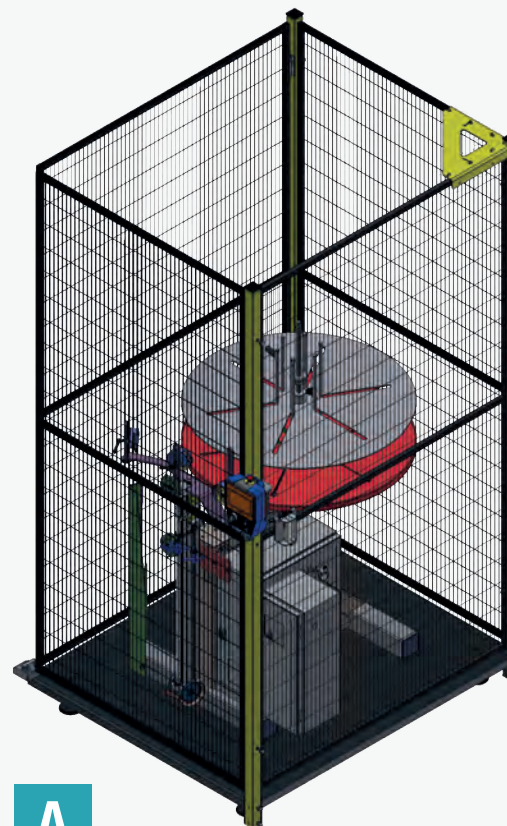

A

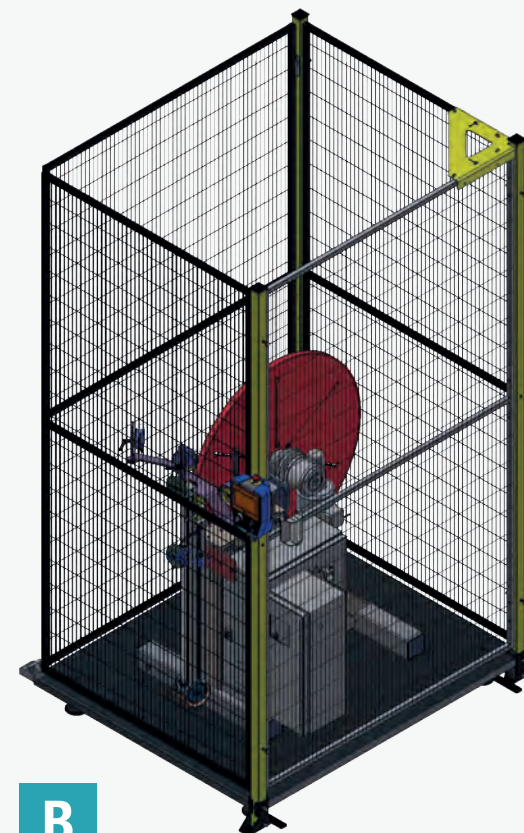


B

ASC100-06-G1 / ASC100-08-G1


CONFIGURATION A



CONFIGURATION B

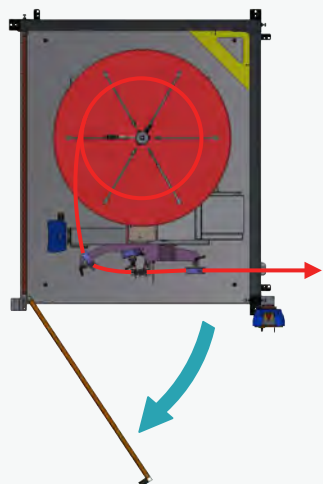

1

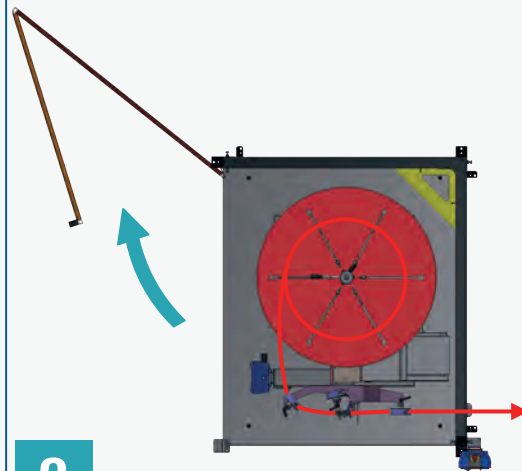

2

