

# ASC250/600-G1



For 250 e 600 kg spools and bundles with safety perimeter guards

Per bobine e rocchetti da 250 e 600 kg con barriere di protezione

Para bobinas y madejas de 250 y 600 kg con barreras de protección

| AVAILABLE MODELS                                                        | ASC250-08-G1                                                                                                                                                                                                                                    | ASC250-10-G1                       | ASC600-08-G1                       | ASC600-10-G1                       | ASC600-12-G1                        |
|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------|------------------------------------|-------------------------------------|
| Features<br>Caratteristiche<br>Características                          | <ul style="list-style-type: none"><li>• Double wire and shock absorber included</li><li>• It is possible to install the ASC-OP-02 optional, second dancer arm for thin wires<sup>[1]</sup></li></ul>                                            |                                    |                                    |                                    |                                     |
| Capacity<br>Capacità di carico<br>Capacidad de carga                    | 250 kg<br>(551 lb)                                                                                                                                                                                                                              |                                    | 600 kg<br>(1322 lb)                |                                    |                                     |
| Recommended for wire<br>Raccomandato per filo<br>Recomendado para hilo  | Ø 0,5 ÷ 3 mm (Ø .01 ÷ .11")<br>In case of ASC-OP-02: Ø 0,1 ÷ 3 mm (Ø .004 ÷ .11")                                                                                                                                                               |                                    |                                    |                                    |                                     |
| Ø Plate<br>Ø Piatto<br>Ø Plato                                          | Ø 800 mm<br>(31.5")                                                                                                                                                                                                                             | Ø 1000 mm<br>(39.3")               | Ø 800 mm<br>(31.5")                | Ø 1000 mm<br>(39.3")               | Ø 1200 mm<br>(47.2")                |
| Inside bundle diameter<br>Ø interno matassa<br>Ø interior madeja        | Ø 215 ÷ 600 mm<br>(Ø 8.46 ÷ 23.6")                                                                                                                                                                                                              | Ø 215 ÷ 700 mm<br>(Ø 8.46 ÷ 27.5") | Ø 215 ÷ 600 mm<br>(Ø 8.46 ÷ 23.6") | Ø 215 ÷ 700 mm<br>(Ø 8.46 ÷ 27.5") | Ø 215 ÷ 900 mm<br>(Ø 8.46 ÷ 35.43") |
| Max speed<br>Velocità max<br>Velocidad máxima                           | 85 rpm                                                                                                                                                                                                                                          |                                    |                                    |                                    |                                     |
| Guards features<br>Caratteristiche barriere<br>Características barreras | <ul style="list-style-type: none"><li>• Fixing to the ground is not mandatory, but is necessary if there is a risk of pay-off dragging in case of large wires, heavy spools or tangling at high speeds.</li><li>• Double opening door</li></ul> |                                    |                                    |                                    |                                     |

## [1] SECOND DANCER ARM

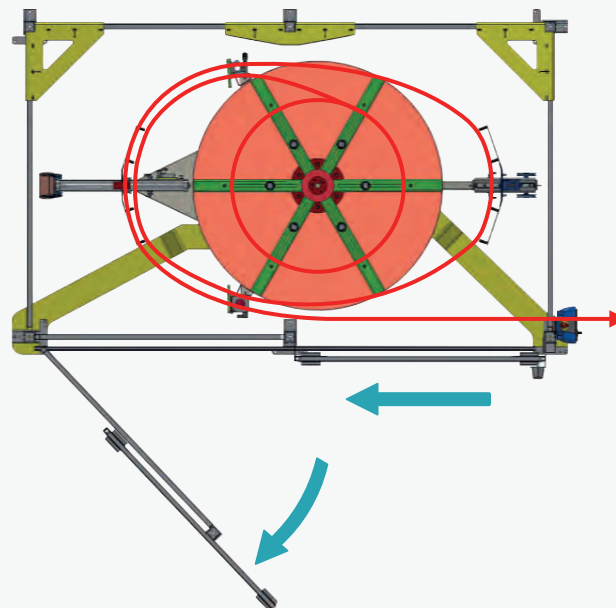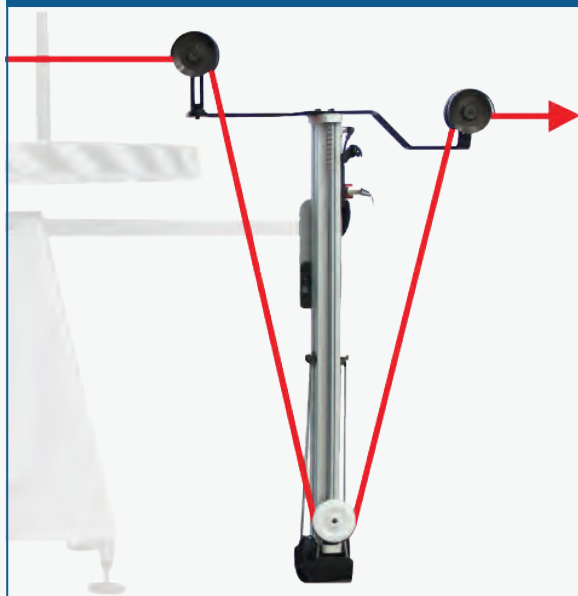

## ASC250-G1 / ASC600-G1





## ASC250-G1 / ASC600-G1

