



ASC610-G1

Pay-off with lower plate for 600 kg spools and bundles, with safety perimeter guards

Aspo con piano ribassato per bobine e rocchetti da 600 kg, con barriere di protezione

Desbobinadores con placa inferior para bobinas y madejas de 600 kg, con barreras de protección

AVAILABLE MODELS	ASC610-10-G1	ASC610-12-G1
Features Caratteristiche Características	• Double wire and shock absorber included • It is possible to install the ASC-OP-02 optional, second dancer arm for thin wires	
Capacity Capacità di carico Capacidad de carga	600 kg (1322 lb)	
Recommended for wire Raccomandato per filo Recomendado para hilo	$\varnothing$ 0,5 ÷ 3 mm ($\varnothing$.01 ÷ .11")	
$\varnothing$ Plate $\varnothing$ Piatto $\varnothing$ Plato	1000 mm (39.4") with 40 mm border	1200 mm (47.2") with 40 mm border
Height of the table Altezza del piatto Alto de la mesa	410 mm (16.14")	
Inside bundle diameter $\varnothing$ interno matassa $\varnothing$ interior madeja	215 mm (8.46")	
Max speed Velocità max Velocidad máxima	110 rpm (Optional ASC-OP-27 recommended)	
Guards features Caratteristiche barriere Características barreras	• Fixing to the ground is not mandatory, but is necessary if there is a risk of pay-off dragging in case of large wires, heavy spools or tangling at high speeds. • Double opening door	

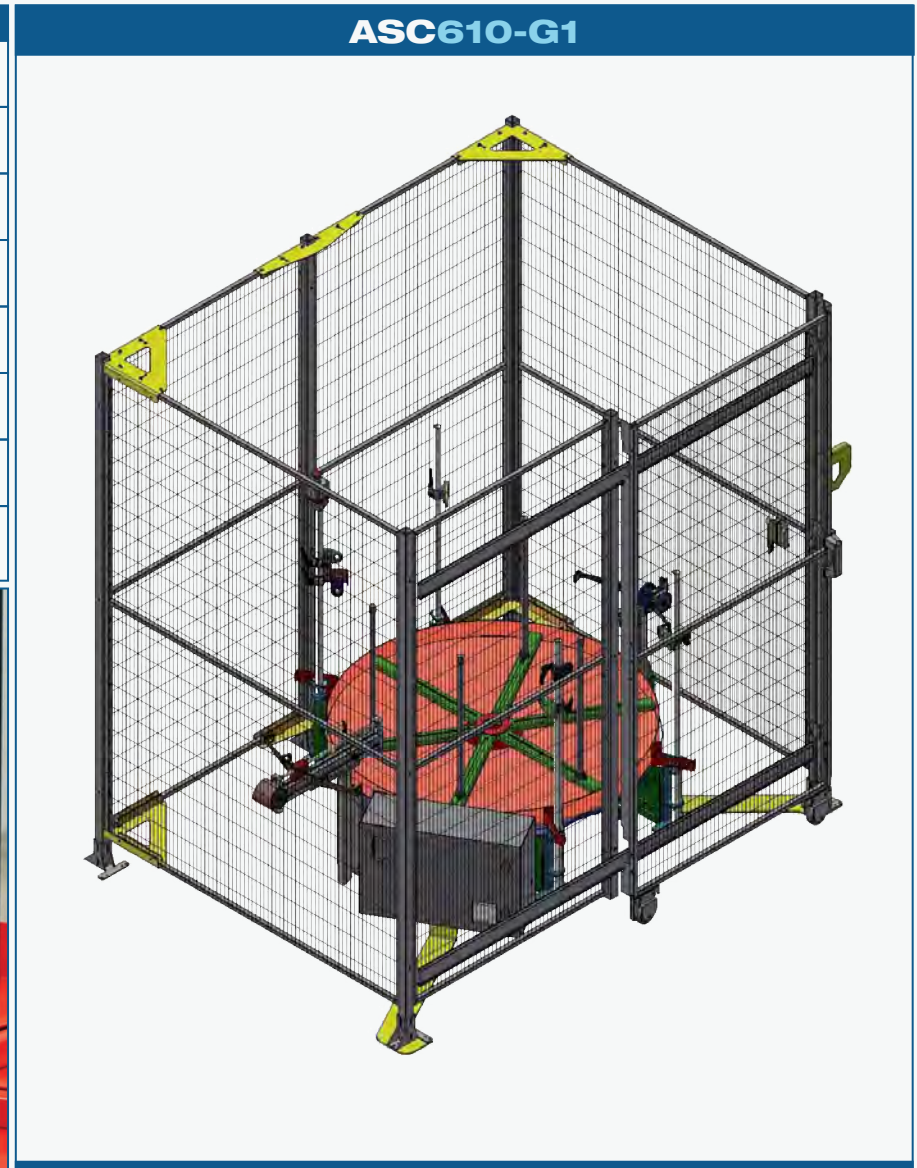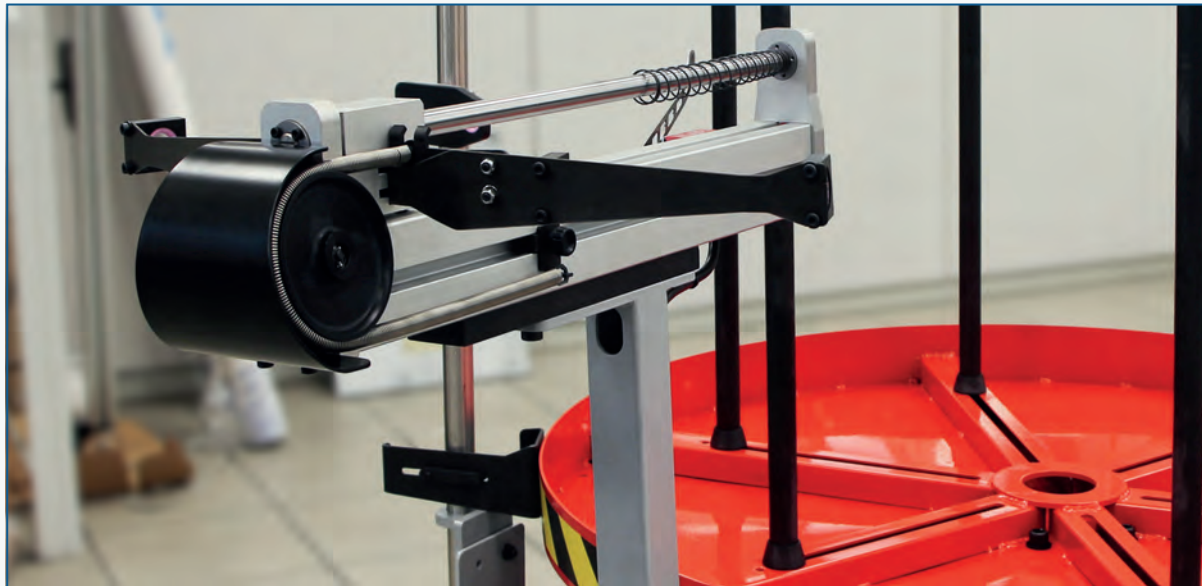

ASC610-10-G1 / ASC612-10-G1

