


Camera calipers for immediate springs measurements

Calibri a telecamera per misure immediate di molle

Calibres con cámara para mediciones inmediatas de resortes

CAL FEATURES

- Instant measurement of length, diameter, pitch, and more
- 8" high-resolution touchscreen
- Measurement export in Excel™
- Connectable to the PMAR8 software for statistical analysis
- Misura immediata di lunghezza, diametro, passo e altro ancora
- Monitor touchscreen da 8" ad alta risoluzione
- Export delle misure in formato Excel™
- Collegabile al Software PMAR8 per l'analisi statistica
- Medición instantánea de longitud, diámetro, paso y más
- Monitor táctil de 8" de alta resolución
- Exportación de medidas en formato Excel™
- Conectable al software PMAR8 para análisis estadístico

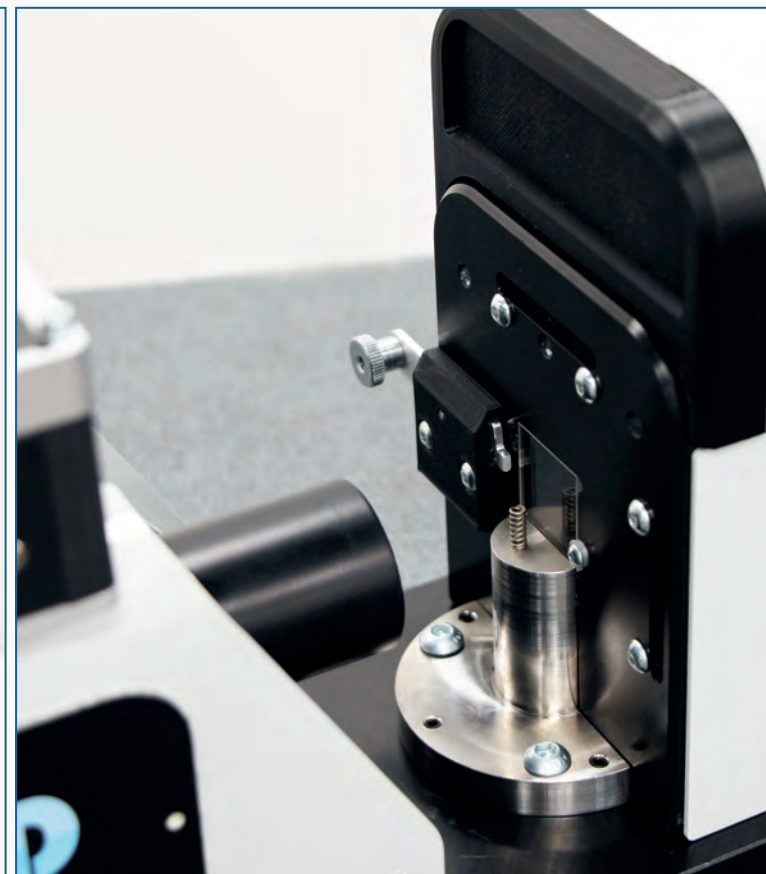

AVAILABLE MODELS	CAL2D-16	CAL2D-50	CAL2D-100	CAL2D-300
L / Ø max compression spring L / Ø max molla a compressione L / Ø máx muelle de compresión	10 mm / 12 mm (.39" / .47")	48 mm / 35 mm (1.8" / 1.3")	120 mm / 80 mm (4.7" / 3.1")	330 mm / 55 mm (13" / 2.1")
Length resolution Risoluzione lunghezza Resolución longitud	0,002 mm (.0001")	0,01 mm (.0004")	0,01 mm (.0004")	0,01 mm (.0004")
Min measurable wire Filo min misurabile Espesor mín del alambre	0,04 mm (.015")	0,1 mm (.004")	0,1 mm (.004")	0,1 mm (.004")
Dimensions Ingombro Tamaño	130 x 200 x 520 (5.1 x 7.8 x 20.7")	130 x 210 x 570 mm (5.1 x 8.2 x 22.4")	415 x 590 x 1160 mm (16.3 x 23.2 x 45.6")	237 x 678 x 618 mm (9.3 x 26.7 x 24.3")

