

ASC100

100 kg pay-off with safety perimeter guards

Aspo svolgitore da 100 kg con barriere di protezione


Desenrollador de 100 kg con barreras de protección

AVAILABLE MODELS	ASC100-08-G1
Features Caratteristiche Características	Reduced dimensions
Recommended for wire Raccomandato per filo Recomendado para hilo	$\varnothing 0,1 \div 0,8 \text{ mm}$ ($\varnothing .004 \div .03''$)
Capacity Capacità di carico Capacidad de carga	100 kg (220 lb)
$\varnothing$ Plate $\varnothing$ Piatto $\varnothing$ Plato	$\varnothing 800 \text{ mm}$ with / without 15 mm border* ($\varnothing 31.5'' - .6''$)
Plate orientation Orientamento del piatto Orientación del plato	Horizontal
Inside bundle diameter Diametro interno matassa Diámetro interior madeja	$\varnothing 215 \div 600 \text{ mm}$ ($\varnothing 8.4 \div 23.6''$)
Max speed Velocità max Velocidad máxima	120 rpm
Guards features Caratteristiche barriere Características barreras	Fixing to the ground is not mandatory

*PLATE WITH / WITHOUT 15 MM BORDER



ASC100

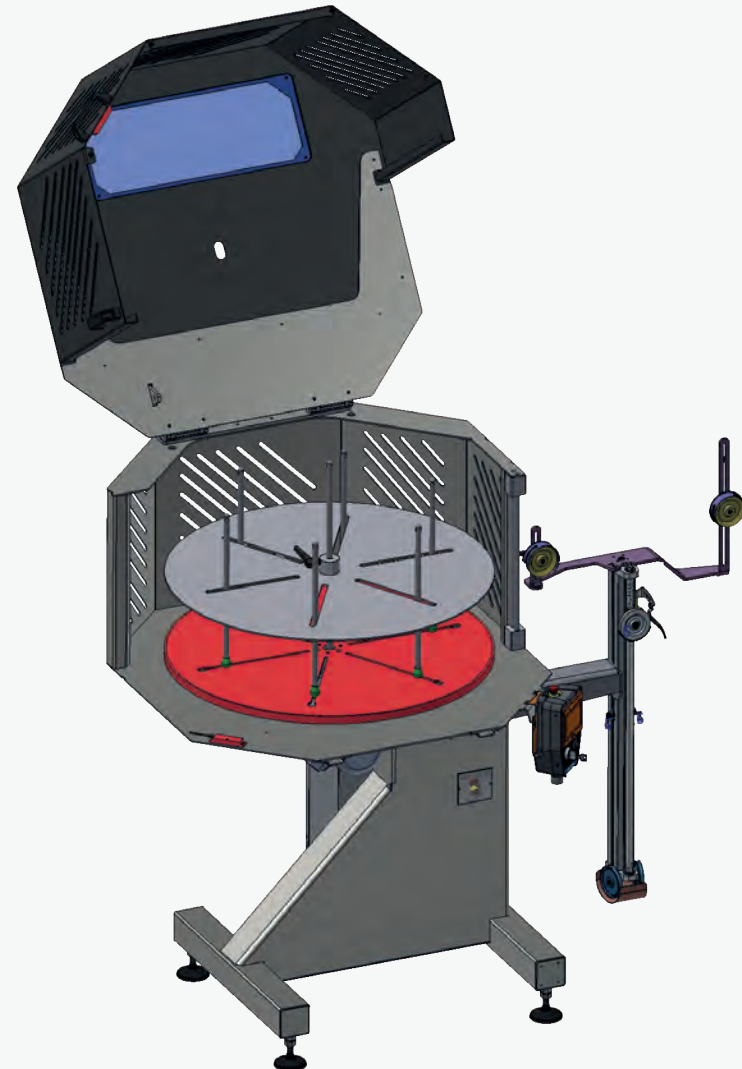

ASC100-08-G1

